



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

## Display Refrigerators (Half Door Model)

<b>DRS MODELS —</b>	<b>DRS-2D-S7-HD</b>	<b>DRSA MODELS —</b>	<b>DRSA-2D-S7-HD</b>	<b>DRA MODELS —</b>	<b>DRA-2D-S7-HD</b>
Stainless steel exterior and interior.		Stainless steel exterior. Aluminum interior.		Stainless steel fronts and doors. Aluminum sides and interior.	

Pass-Thru and Remote Models Available



**DRS-2D-S7-HD**

### DRS and DRSA Models

- Digital Thermometer/Battery Back-Up
- Adjustable Stainless Steel Legs

### DRA Model

- Dial Thermometer
- Adjustable Legs

### Standard Features (all models)

- Energy Saver Switch
- Fluorescent Light Switch
- Stainless Steel Case Front and Hinged Doors
- Lifetime Heavy-Duty Cam Lift Hinges and Safety Grip Handles
- Adjustable Wire Shelves
- Self-Closing Double Pane Glass Doors
- Self-Closing Doors with Safety Stops
- Bright Fluorescent Interior Lighting
- Energy Saving Thermal Breaker Strips
- Hinged Doors with Heavy-Duty Cylinder Locks
- Sliding Doors with Plunger Locks
- One Piece Self-Adjusting Magnetic Door Gaskets
- High Impact ABS Interior Door Liner
- Plasticized Fin Coil
- Environmentally Friendly R-134a Refrigerant
- Non-Electric Condensate Evaporator
- Cord and Plug Attached on 115v Models 12 Amps or Less

### Optional Features and Accessories

- Dial or Digital Thermometer
- Sliding Glass Doors in Place of Hinged Door
- Change Door Swing
- Adjustable Stainless Steel Wire Shelves
- Stainless Steel Angle Pan Slides
- Zinc Plated Wire Pan Slides
- 5" Diameter Heavy-Duty Swivel
- Casters with Brakes
- Stainless Steel Case Back
- Remote and Pass-Thru Models

### Cabinet:

The Victory Display Refrigerator is ideal for applications where display of products is required for customer self-service sales and can be used as a working refrigerator where space is limited. The cabinet front is constructed of heavy gauge polished stainless steel. Foamed-in-place polyurethane insulation throughout the cabinet ensures the ultimate in energy efficiency. Each display refrigerator has bright fluorescent interior lighting to give high visibility to the stored product.

### Doors:

The self-closing, sliding glass doors are double glass vacuum-sealed and are completely encased in stainless steel frames. The doors glide easily on stainless steel ball bearing wheels. The lower self-closing stainless steel doors have lifetime cam-lift hinges and safety grip handles.

### Shelving:

The wire shelves are adjustable in one-inch increments. A wide variety of optional pan slides for 18"x26" and 14"x18" trays and pans are available.

### Refrigeration System:

All components of the self-contained refrigeration system are mounted on top of the cabinet. The air circulating fans and the forced convection-cooling coil are contained in an insulated housing separate from the product food zone allowing for maximum food storage capacity. All condensate water is disposed of automatically by the energy efficient non-electric condensate evaporator, no plumbing is required.

Approvals:		Victory Refrigeration specification sheets are available online at <a href="http://www.victory-refrig.com">www.victory-refrig.com</a> .
------------	--	---

CHARACTERISTICS	TWO SECTION	
	Reach-In	Pass-Thru
Width, Overall	52 1/8	52 1/8
Depth, Overall (incl. handles)	34 1/2	38
Height, Overall (incl. adj. legs)	84	84
Depth, Door(s) Open 90°	58 1/8	84 5/8
Clear Sliding Door Width	19 1/2	19 1/2
Clear Hinged Door Width	21 1/8	21 1/8
Clear Half Door Height	25 3/8	25 3/8
Capacity Net (cubic feet)	46.5	48.0
No. of Half Doors	4	8
No. of Shelves	6	6
Shelf Area (square feet)	36.0	36.0
Cabinet Voltage	115/60/1	115/60/1
Feed Wires	2	3
Condensing Unit Voltage	115/60/1	208-230/60/1
Condensing Unit Size (HP)	1/2	3/4
Total Amperes	10.2	8.8

Crated dim. & wts. Ht. Width Depth Cu.Ft. Lbs

Two Section 84 1/4 63 7/8 44 7/4 143.3 605

Approximate Pass-Thru weights, add 15%


**FOR REMOTE MODELS**— Substitute an "R" for the "S" in suffix. For example: Model DRS-1D-S7-HD (self-contained) would be DRS-1D-R7-HD remote cabinet. Air circulating fans, expansion valve and plasticized coil are provided. Condensing units not supplied. The following units are recommended with 1/2" O.D. Suction line, 1/4" O.D. Liquid line.

**REMOTE REFRIGERATION**

	Cond. Unit	BTUH	Cabinet	Amps
Two Section	1/2 H.P.	4400	115/60/1	3.7

For Remote Pass-Thru—Consult factory

Dimensional tolerance ± 1/4" Metric dimensions (MM)

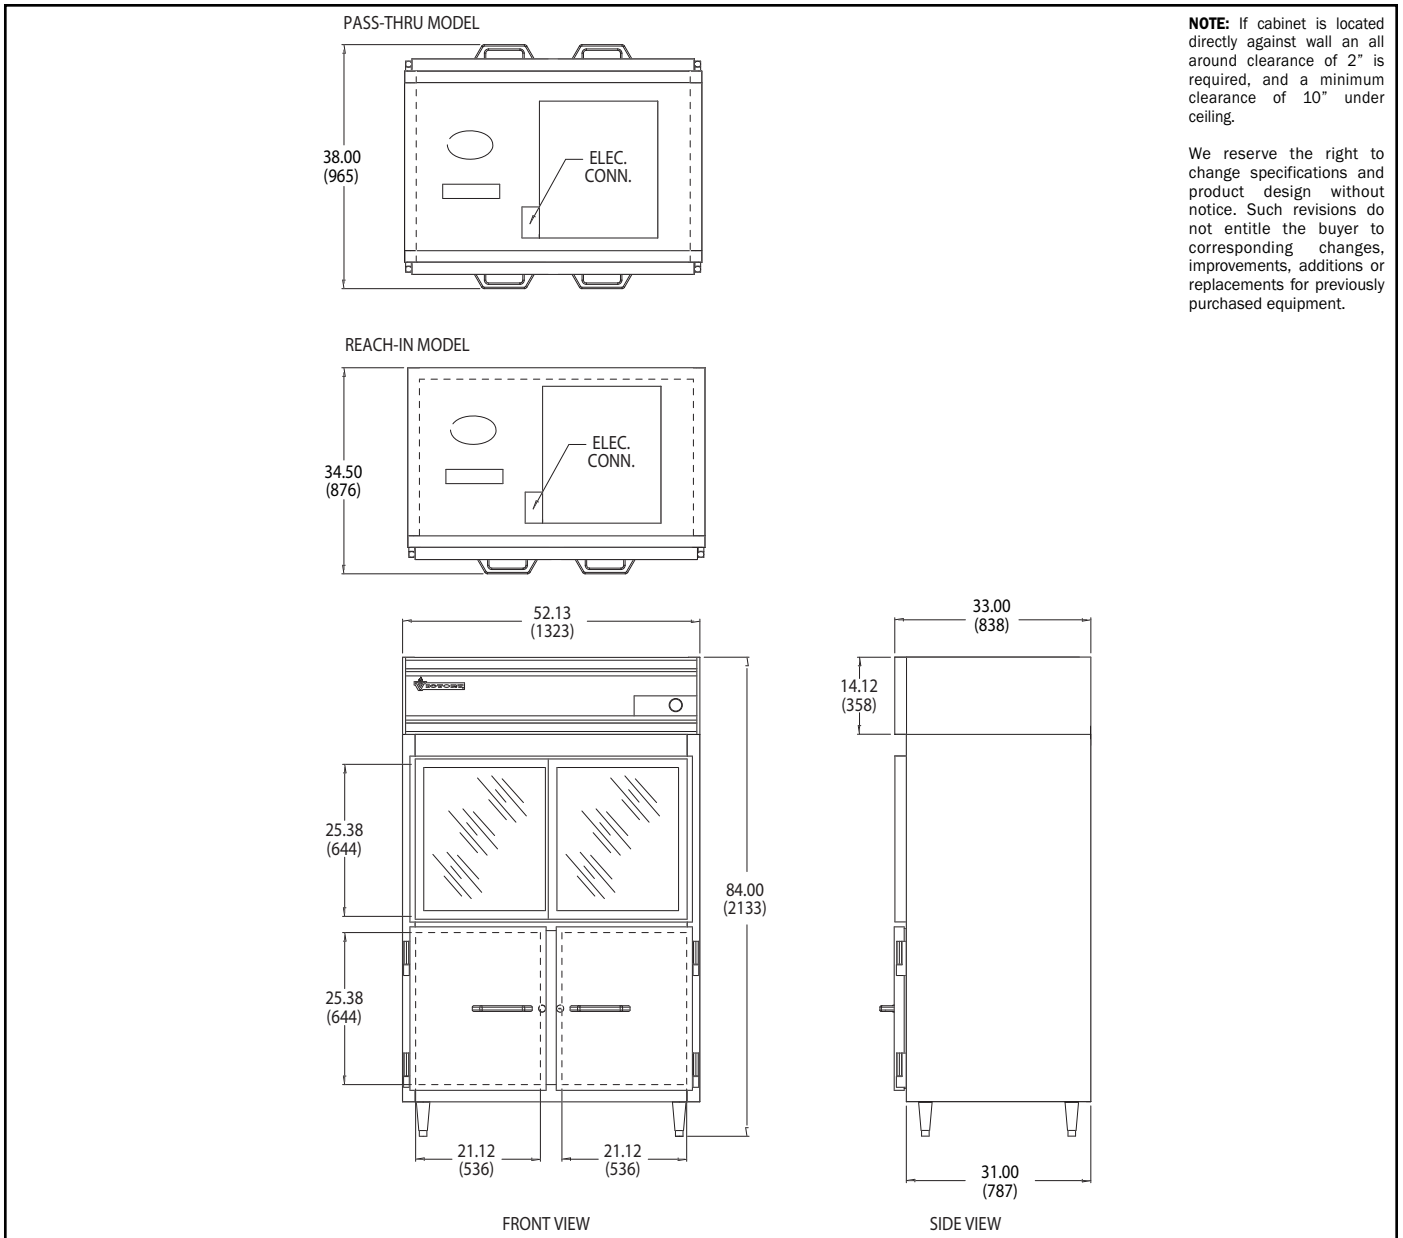

**NOTE:** If cabinet is located directly against wall an all around clearance of 2" is required, and a minimum clearance of 10" under ceiling.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.