



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

## Roll-In Warming Cabinets

**HIS MODELS —**  
 Stainless steel exterior and interior.

**HIS-1D-S7  
 HIS-2D-S7**

**HISA MODELS —**  
 Stainless steel exterior. Aluminum interior.

**HISA-1D-S7  
 HISA-2D-S7**

**HIA MODELS —**  
 Stainless steel fronts and doors. Aluminum sides and interior.

**HIA-1D-S7  
 HIA-2D-S7**



**HIS and HISA Models**

- Digital Thermometer/Battery Back-up

**HIA Models**

- Dial Thermometer

**Standard Features (all models)**

- Thermal Controls
- Stainless Steel Case Front and Door(s)
- Lifetime Heavy-Duty Cam Lift Hinges
- Lifetime Safety Grip Handle(s)
- Self Closing Doors with Safety Stops
- Adjustable Wiper Gasket(s)
- Removable Ramp(s)
- Door Opening Accepts Carts up to 27" Wide x 29" Deep x 64" High
- Heavy-Duty Cylinder Locks
- One Piece Self-Adjusting Magnetic Door Gaskets

**Optional Features and Accessories**

- Dial or Digital Thermometer
- Hinged Glass Doors with Cylinder Locks
- Change Door Swing
- Shelf Pilaster Strips
- Adjustable Stainless Steel Wire Shelves
- Stainless Steel Wire Pan Slides
- Stainless Steel Angle Pan Slides
- Zinc Plated Wire Pan Slides
- Stainless Steel Case Back

**Cabinet:**

Each Victory cabinet is internally supported, braced and assembled into a single rigid unit. The cabinet front and doors are constructed of heavy gauge polished stainless steel to maintain an attractive appearance after years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet and doors ensures the ultimate in energy efficiency. An operational indicator panel contains a thermometer and thermal control which is accurately calibrated from 80°F to 180°F.

grip handle is guaranteed for life. Removable ramps are provided on the bottom of each door opening.

**Heating System:**

Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment. An external mounted blower system maintains even temperature through out the food zone. Manually controlled humidity vents are provided in the top of the cabinet.

**Doors:**

The self-closing doors are securely mounted on rugged cam-lift hinges, which have a lifetime guarantee. Each door has a heavy-duty cylinder lock and self-adjusting magnetic gasket. The full perimeter of the door opening has a stainless steel door jamb. The interior door liner is constructed of heavy gauge stainless steel. Each safety

Approvals:




Victory Refrigeration specification sheets are available online at [www.victory-refrig.com](http://www.victory-refrig.com).

| CHARACTERISTICS                     | ONE SECTION  |              | TWO SECTION  |              |
|-------------------------------------|--------------|--------------|--------------|--------------|
|                                     | Roll-In      | Roll-Thru    | Roll-In      | Roll-Thru    |
| Width, Overall                      | 36 1/2       | 36 1/2       | 68 7/8       | 68 7/8       |
| Depth, Overall (incl. handles)      | 35 7/8       | 39 3/8       | 35 7/8       | 39 3/8       |
| Height, Overall                     | 84           | 84           | 84           | 84           |
| Depth, Doors Open 90°               | 65 1/4       | 98 1/8       | 65 1/4       | 98 1/8       |
| Depth, Case Over Ramps              | 35 1/2       | 38 1/2       | 35 1/2       | 38 1/2       |
| Clear Door Width                    | 27 3/4       | 27 3/4       | 27 3/4       | 27 3/4       |
| Clear Full Door Height              | 65 1/4       | 65 1/4       | 65 1/4       | 65 1/4       |
| Capacity Net (cubic feet)           | 33.6         | 36.2         | 67.2         | 72.4         |
| No. of Full Doors                   | 1            | 2            | 2            | 4            |
| Cabinet Voltage                     | 208-240/60/1 | 208-240/60/1 | 208-240/60/1 | 208-240/60/1 |
| Max. Fuse Size T.D.                 | 15 Amps      | 15 Amps      | 20 Amps      | 20 Amps      |
| Feed Wires                          | 2            | 2            | 2            | 2            |
| Heater Watts per Section (@240V)    | 1500         | 1500         | 1500         | 1500         |
| Total Wattage (Heaters & Fan @240V) | 1500         | 1500         | 3000         | 3000         |
| Total Amperes                       | 6.3          | 6.3          | 12.5         | 12.5         |

| Crated dim. & wts. | Ht. | Width  | Depth | Cu.Ft. | S   | SA  | A   |
|--------------------|-----|--------|-------|--------|-----|-----|-----|
| One Section        | 87  | 42     | 43    | 94.1   | 440 | 430 | 350 |
| Two Section        | 87  | 74 5/8 | 43    | 168.1  | 850 | 810 | 770 |

Approximate Roll-Thru weights, add 15%

Dimensional tolerance ± 1/4" Metric dimensions (MM)

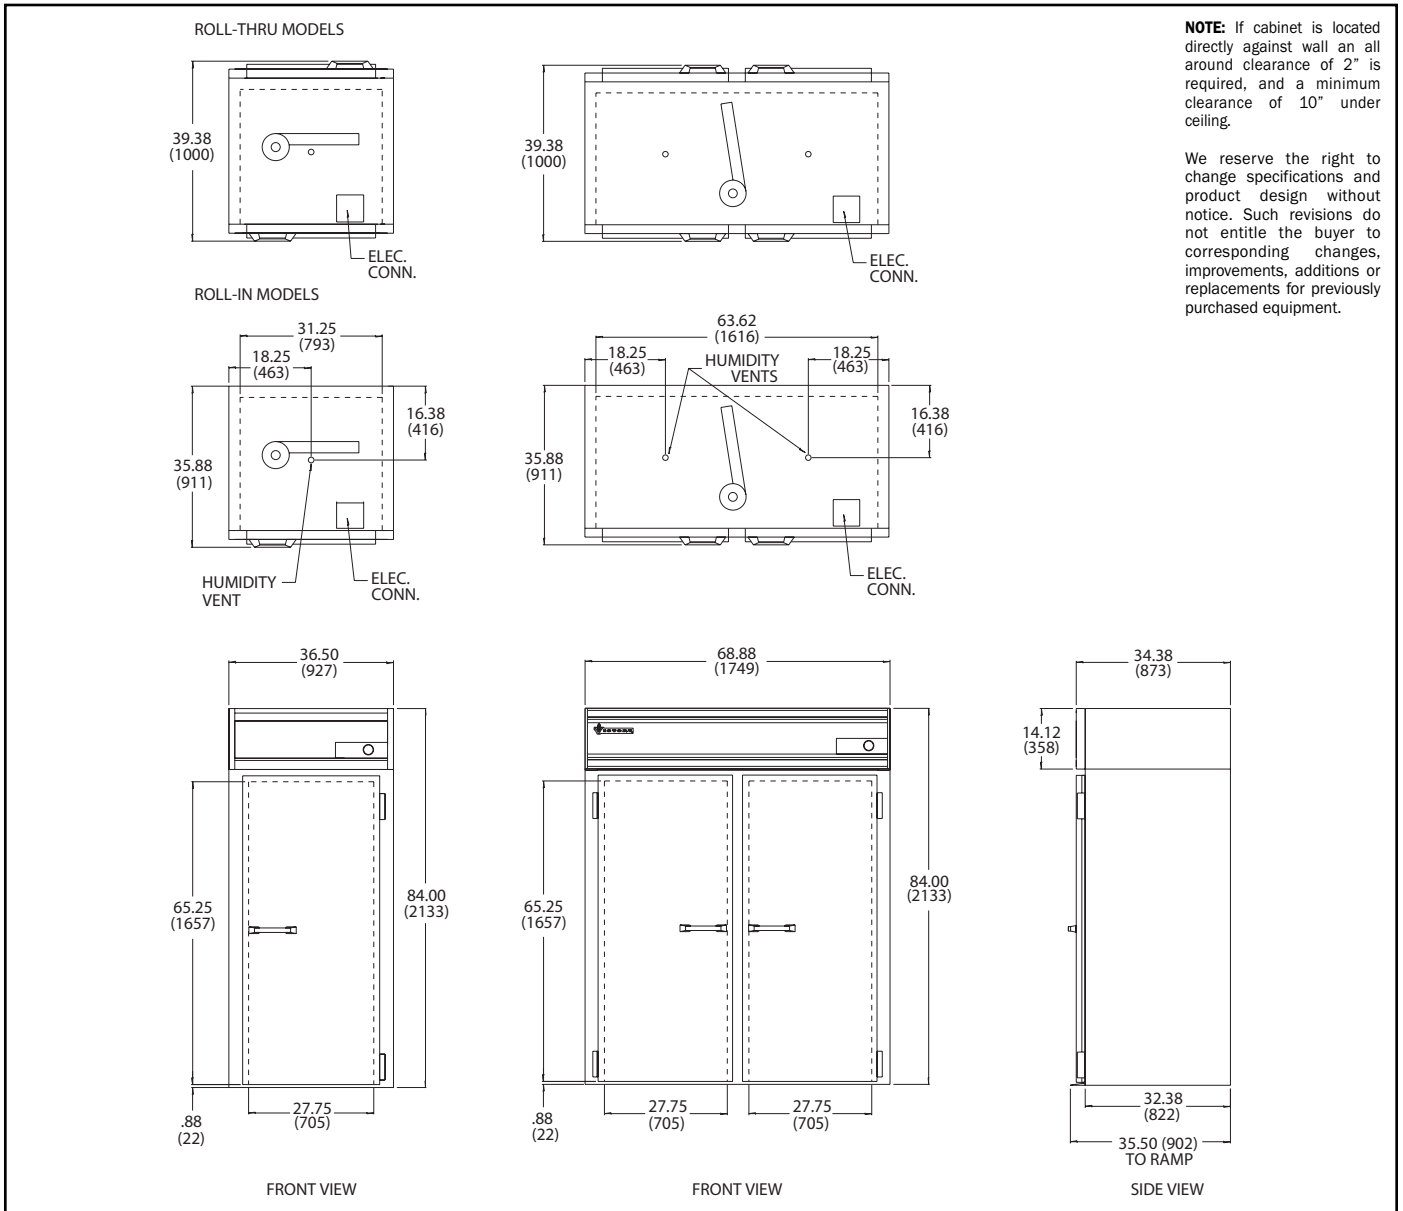

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.