



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

## Extra-Wide Warmers

### HS MODELS —

Stainless Steel Exterior  
 Stainless Steel Interior

**HS-1D-S7-EW**  
**HS-2D-S7-EW**

### HSA MODELS —

Stainless Steel Exterior  
 Aluminum Interior

**HSA-1D-S7-EW**  
**HSA-2D-S7-EW**

#### Half Door and Pass-Thru Models Available



**HS-2D-S7-EW**

#### Standard Features (all models)

- Digital Thermometer/Battery Back-Up
- Adjustable Stainless Steel Legs
- Stainless Steel Case front, Door(s) and Sides
- Heavy-Duty Lifetime Cam Lift Hinges
- Adjustable Wire Shelves
- Lifetime Safety Grip Handle(s)
- Self-Closing Doors with Safety Stops
- Flush Mounted Automatic Interior Lighting
- Humidity Vent(s) Manually Operated
- Door Opening Accepts 12" x 20" and 18" x 26" pans
- Heavy-Duty Cylinder Locks
- One Piece Self Adjusting Magnetic Door Gasket(s)
- Stainless Steel Interior Door Liner(s)
- Adjustable Thermostat

#### Optional Features and Accessories

- Dial Thermometer
- Two Half Doors in Place of One Full Length Door(s)
- Full and Half Sized Hinged Glass Doors with Cylinder Locks
- Change Door Swing
- Adjustable Stainless Steel Wire Shelves
- Stainless Steel Angle Pan Slides
- Zinc Plated Wire Pan Slides
- 5" Diameter Heavy-Duty Swivel Casters with Brakes
- Stainless Steel Case Back
- Pass-Thru Models

#### Cabinet:

The cabinet front and doors are constructed of heavy gauge polished stainless steel to maintain an attractive appearance for years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet and doors ensures the ultimate in energy efficiency. An operational indicator panel contains a thermostat which is accurately calibrated from 80 °F to 180 °F.

#### Doors:

The self-closing doors are securely mounted on rugged cam-lift hinges which have a lifetime guarantee. Each door has a heavy duty cylinder lock and self-adjusting magnetic gasket. The full perimeter of the door opening has a stainless steel door jamb. The interior door liner is constructed of heavy gauge stainless steel. Each safety grip handle is guaranteed for life. Interior lighting is controlled by a switch mounted in the hinge.

#### Shelving:

The heavy-duty wire shelves are adjustable in one inch increments. A wide door opening allows the use of a variety of optional pan slide types for 12" x 20", 18" x 26" and 14" x 18" pans and trays.

#### Heating System:

Strip type 750 watt heating elements operating on 208-240/60/1, having a total of 1500 watts per compartment. An externally mounted blower system maintains even temperature through out the food zone area. Manually controlled humidity vents are provided in the top of the cabinet.

Approvals:




Victory Refrigeration specification sheets are available online at [www.victory-refrig.com](http://www.victory-refrig.com)

CHARACTERISTICS	ONE SECTION		TWO SECTION	
	Reach-In	Pass-Thru	Reach-In	Pass-Thru
Width, Overall	31-1/4	31-1/4	58-3/8	58-3/8
Depth, Overall (incl. handles)	34-1/2	36	34-1/2	36
Height, Overall (incl. adj. legs)	84	84	84	84
Depth, Door(s) Open 90°	58-1/4	85-1/2	58-1/4	85-1/2
Clear Door Width	22-3/4	22-3/4	22-3/4	22-3/4
Clear Full Door Height	54-5/8	54-5/8	54-5/8	54-5/8
Clear Half Door Height	25-1/4	25-1/4	25-1/4	25-1/4
Capacity Net (cubic feet)	24.4	26.2	52.0	55.6
No. of Full Doors	1	2	2	4
No. of Half Doors	2	4	4	8
No. of Shelves	3	3	6	6
Shelf Area (square feet)	19.1	19.1	38.2	38.2
Cabinet Voltage	208-240/60/1	208-240/60/1	208-240/60/1	208-240/60/1
Max Fuse Size T.D.	15 Amps	15 Amps	20 Amps	20 Amps
Feed Wires	2	2	2	2
Heater Watts per Section @ 240V	1500	1500	1500	1500
Total Wattage (Heaters & Fan @ 240V)	1500	1500	3000	3000
Total Amperes	6.3	6.3	13.0	13.0

Crated dim. & wts.	Ht.	Width	Depth	Cu. Ft.	Lbs. HS	Lbs. HA
One Section	80-3/8	36-1/2	44-3/4	82.2	435	395
Two Section	80-3/8	63-5/8	44-3/4	143.3	700	635

Approximate Pass-Thru Weights, add 15%

Dimensional Tolerance +/- 1/4" Metric Dimensions (MM)

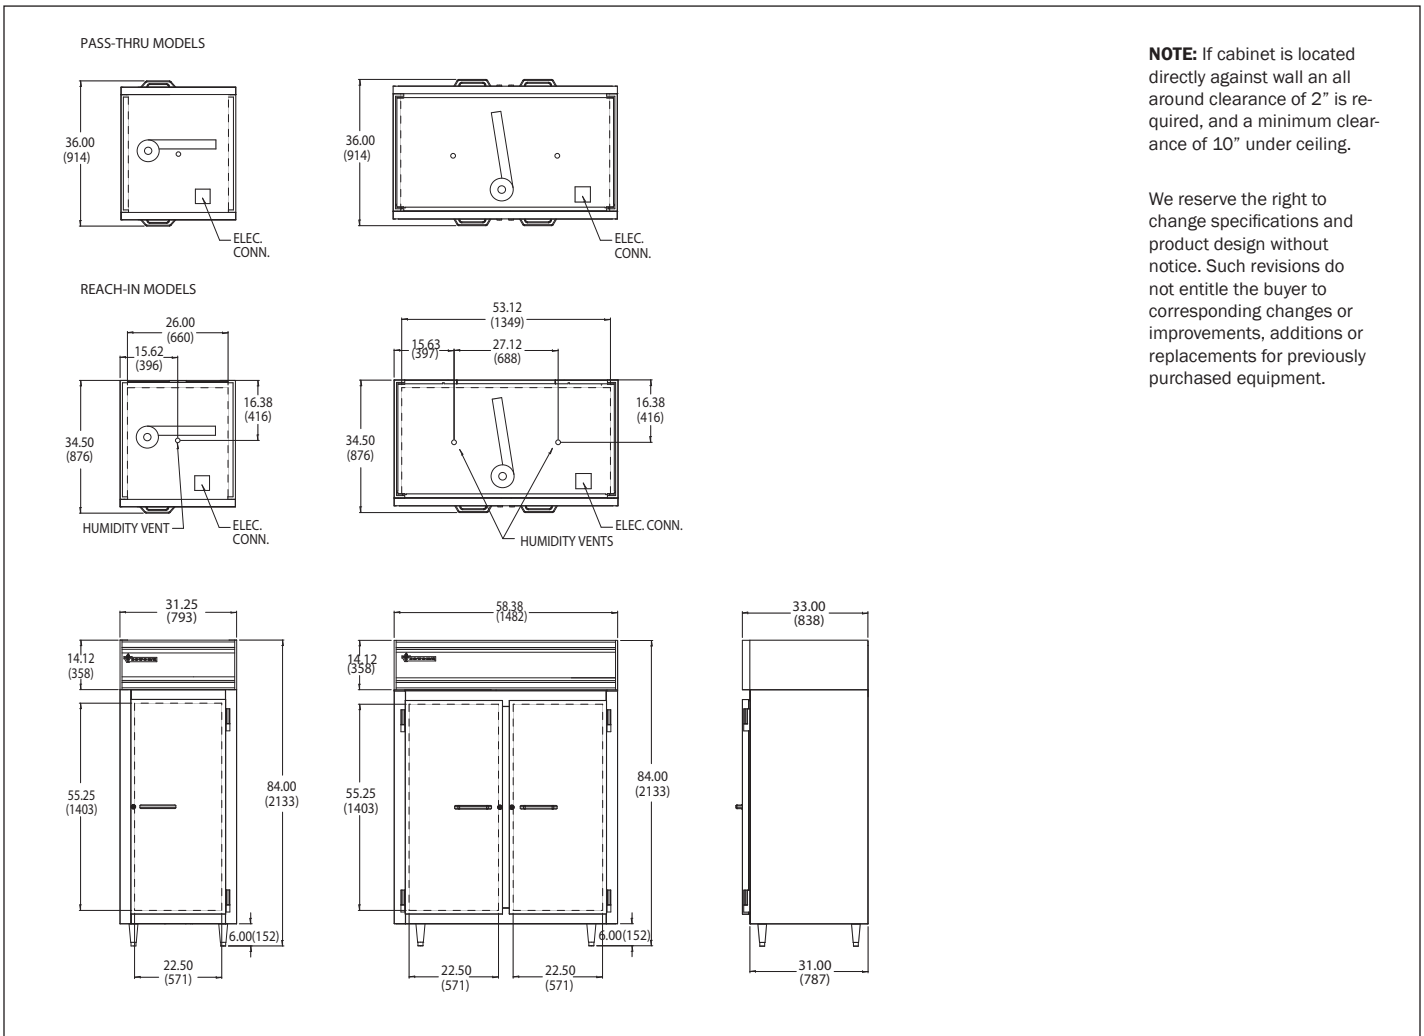

**NOTE:** If cabinet is located directly against wall an all around clearance of 2" is required, and a minimum clearance of 10" under ceiling.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes or improvements, additions or replacements for previously purchased equipment.

Continuous product development may necessitate specification and design changes without notice.



Victory participates in the KCL CADalog, the most current symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEEDA/FCSI recommended guidelines.